



Axpert VM III 1.5kW/3kW/4kW/5kW/6kW

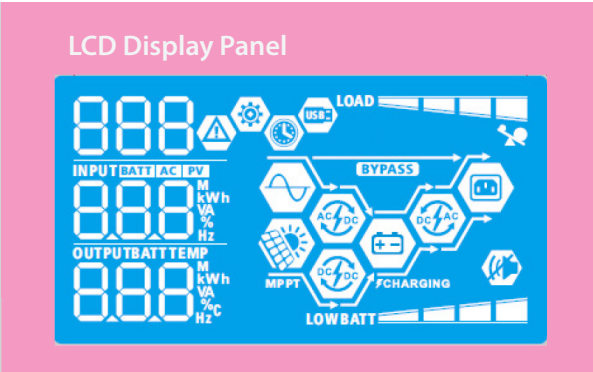

- Detachable LCD control module with various communications

This detachable LCD control module can be turned to remote panel. Users can install the LCD panel in accessible area away from inverter up to 20 meters.

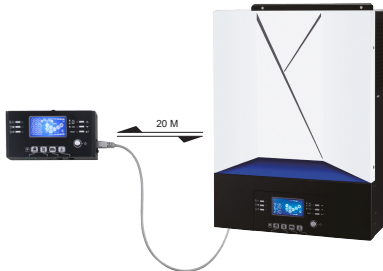

- Integrated WiFi interface with Mobile App

VM III series is integrated WiFi interface ready for mobile monitoring. Mobile monitoring can be carried out through mobile applications in both iOS and Android. Users can track the history of the unit information such as energy generation and change parameter settings timely.



- Supports USB On-the-Go function

VM III series supports USB On-the-Go function to facilitate data upload/download.



- Reserved communication port (RS-485, CAN-BUS or RS-232) for BMS

This third generation inverter is reserved communication port for BMS. For the detailed information, please contact sales directly.




- Battery equalization extends lifecycle

This inverter charger is built in battery equalization function. This function will help remove sulfation to optimize battery performance and even extend lifecycle.

- Battery independency

Inverter can keep supplying power to the loads from PV energy or the grid without battery connected.

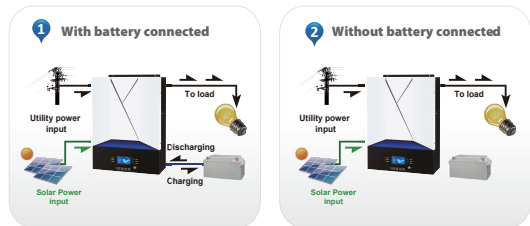

- User-friendly LCD operation

Users can easily set up or change the charging current, output source and charger source prioritization through LCD control panel to optimize inverter performance.



- Replaceable fan design

VM III series is designed with replaceable fan. It will simplify the maintenance and reduce the maintenance cost.



Axpert VM III Off-Grid Inverter Selection Guide

MODEL	Axpert VM III-1500-24	Axpert VM III-3000-24	Axpert VM III-4000-24	Axpert VM III-5000-48	Axpert VM III-6000-48
Rated Power	1500VA/1500W	3000VA/3000W	4000VA/4000W	5000VA/5000W	6000VA/6000W
INPUT					
Voltage	230 VAC				
Selectable Voltage Range	170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)				
Frequency Range	50 Hz/60 Hz (Auto sensing)				
OUTPUT					
AC Voltage Regulation (Batt. Mode)	230VAC \pm 5%				
Surge Power	3000VA	6000VA	8000VA	10000VA	12000VA
Efficiency (Peak)	93%				
Transfer Time	10 ms (For Personal Computers) 20 ms (For Home Appliances)				
Waveform	Pure sine wave				
BATTERY					
Battery Voltage	24 VDC			48 VDC	
Floating Charge Voltage	27 VDC			54 VDC	
Overcharge Protection	33 VDC			63 VDC	
SOLAR CHARGER & AC CHARGER					
Solar Charger type	MPPT				
Maximum PV Array Power	2000W	4000W	5000W	5000W	6000W
MPP Range @ Operating Voltage	120 ~ 380 VDC	120 ~ 450 VDC			
Maximum PV Array Open Circuit Voltage	400 VDC	500 VDC			
Maximum Solar Charge Current	60A	100A	120A	100A	120A
Maximum AC Charge Current	40A	100A	100A	100A	100A
Maximum Charge Current	60A	100A	120A	100A	120A
PHYSICAL					
Dimension, D x W x H (mm)	100 x 280 x 390	115 x 300 x 400			
Net Weight (kgs)	8.5	9	9	10	10
Communication Interface	USB/RS232/RS485/WiFi/Dry-contact				
OPERATING ENVIRONMENT					
Humidity	5% to 95% Relative Humidity (Non-condensing)				
Operating Temperature	-10°C to 50°C				
Storage Temperature	-15°C to 60°C				

Product specifications are subject to change without further notice.